



U Series Bag-in-Box Syrup Pump

NEW integrated pump enhances backroom package performance while reducing costs

The new U Series Bag-in-Box Syrup Pump, inspired by the market's most reliable Bag-in-Box Pump platform, saves time, space and money. Its integrated, modular construction requires less material and supports faster assembly and installation.

This air-operated pump easily handles all syrup viscosities, including high-yield syrups, for run lengths up to 100 feet. The U Series is engineered for durability and performance. The result: better backroom dispensing at a lower lifetime cost.

Features and Benefits

- Patented Integrated Gas Manifold: Reduces parts and labor needed to build backroom kits
- Modular Construction: Makes it easy to configure, install and service
- Reduced Footprint
- Handles all syrup viscosities, including high-yield syrups
- Flojet is the bag-in-box industry standard, providing efficient fluid handling solutions for the world's two largest water users
- Our air-operated pumps have served up more than two billion fountain drinks
- Proven diaphragm pump technology ensures operational excellence
- Flojet brands build on 40 years of operational excellence and applications expertise, with a broad range of solutions for the food and beverage industry



Save with Modular Design
Use less material – install faster


FLOJET
a xylem brand

U Series Bag-in-Box Syrup Pump

FOR BACKROOM DISPENSING




Installation & Operation

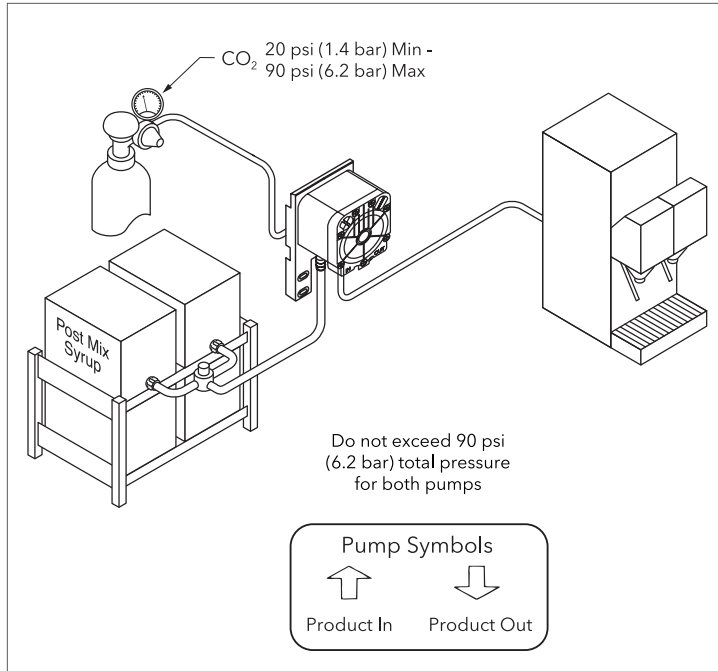


Specifications

Pump Design	Positive Displacement, Double Diaphragm
Power Source	CO ₂ Gas, Nitrogen or Compressed Dry Filtered Air
Materials of Construction (Wetted Parts)	Polypropylene, E.U. Food Contact & NSF Elastomer, EPDM, AISI 303 or 304 Stainless Steel
Temperature Limits	34° - 120°F (1.1° - 49°C)
Weight	1.6lbs (0.73kg)
Dimensions	6.75" H x 4.00" W x 5.50" D (171.5mm x 101.6mm x 139.7mm)
Displacement	2.2 oz (65.1 ml) per cycle
Self Priming	Up to 10ft (3.05m)
Operating Pressure	20 psi (1.4 bar) min / 90 psi (6.2 bar) max
Liquid Inlet Pressure	5 psi (0.34 bar) max
Flow Rate	4.3 oz (127.2 ml) / sec - Open Flow
Noise Level	Maximum 80 dB
Approvals	NSF listed & CE

Dimensional Drawing

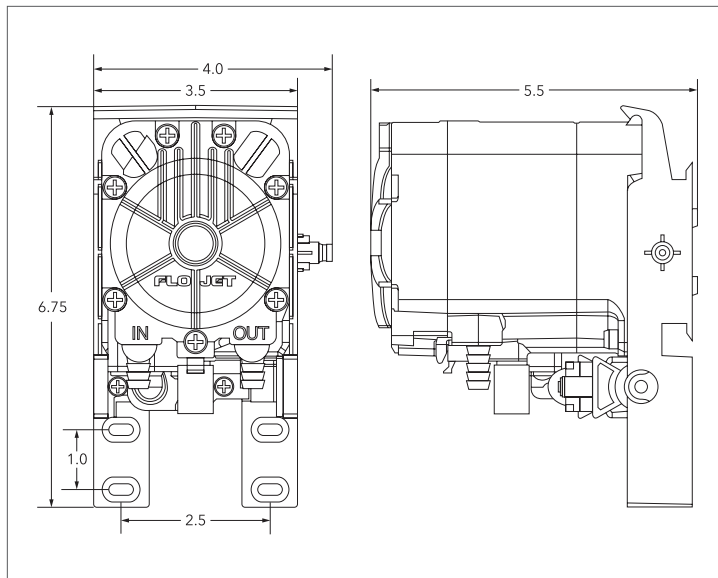

Exploded View

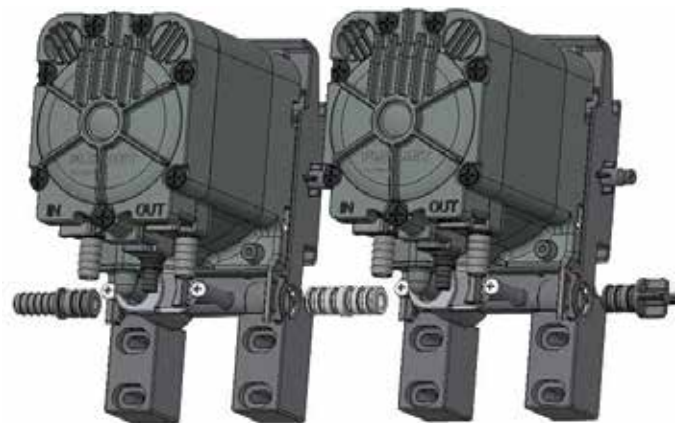

Warranty: All products of the company are sold and all services of the company are offered subject to the company's warranty and terms and conditions of sale, copies of which will be furnished upon request. The information provided herein is for guidance only, it does not constitute a guarantee of the performance or specification of any individual product or component.

www.xylem.com

USA
 Xylem, Inc.
 17942 Cowan
 Irvine, CA 92614
 Tel (949) 608-3900
 Fax (949) 609-3887

UK
 Xylem, Inc.
 Bingley Road, Hoddesdon
 Hertfordshire EN11 0BU
 Tel +44 (0) 1992 450145
 Fax +44 (0) 1992 467132

GERMANY
 Xylem, Inc.
 Oststrasse 28
 22844 Norderstedt
 Tel +49-40-53 53 73-0
 Fax +49-40-53 53 73-11

CHINA
 Xylem, Inc.
 30/F, Tower A Hongqiao City Center of Shanghai
 100 Zunyi Road, Shanghai 200051, China
 Tel +(86) 21 2208 2888
 Fax +(86) 21 2208 2999

ITALY
 Xylem, Inc.
 Via Tommaseo, 6
 20059 Vimercate, Milano
 Tel +39 039 685 2323
 Fax +39 039 666 307